
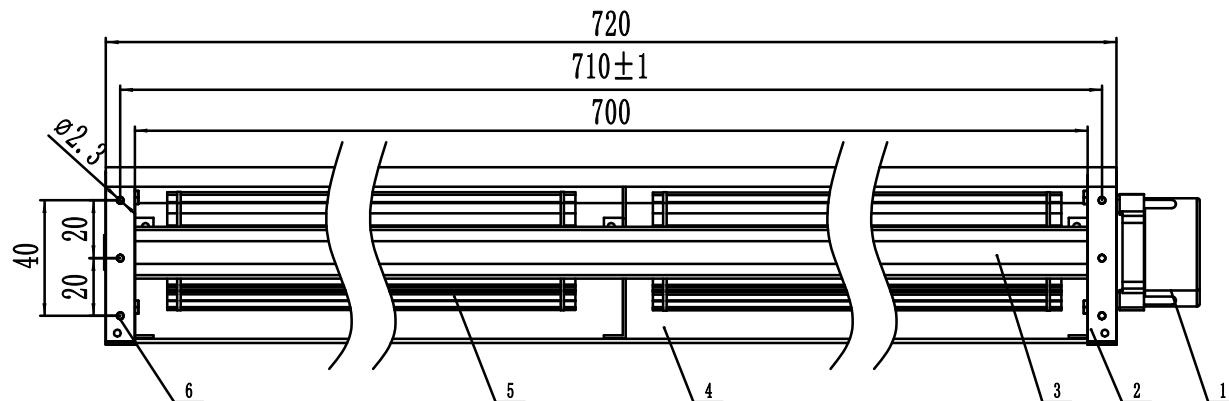


1. The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects.
2. Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
3. Make the impeller 22 blades, steel shaft $\varnothing 3$, bushing $\varnothing 1.5$
4. Safety performance in accordance with GB/T13933-2008 regulations.
5. Unnoted tolerance is GB/T1804-v.

SPECIFICATION	
VOLTAGE (V)	24
CURRENT (A)	0.23
SPEED (r/min)	2400
BEARINGS	Ball bearing
SPEED CONTROL	0~10V

7		Grille	1	Aluminium			
6		Left Side Plate	1	Iron			
5		Impeller	2	Aluminium			
4		Air Outlet Plate	1	Aluminium			
3		Air Inlet Plate	1	Aluminium			
2		Right Side Plate	1	Iron			
1	3725	Motor	1				

序号	代号	名称	数量	材料	单件	总计	备注				
					重量						
			Stage Mark			Material		Ratio	1:1	Weight	
			S				Ningbo Longwell Electric Technology Co., Limited				
			Version	A1	Name	Date	LWCD-40700MG-06				
			Design	Zhong	20241019						
			Audit								
			Technical								
			Standard								
Mark	Qty	Sign	Name	Date	Approve		第 1 页		共 1 页		