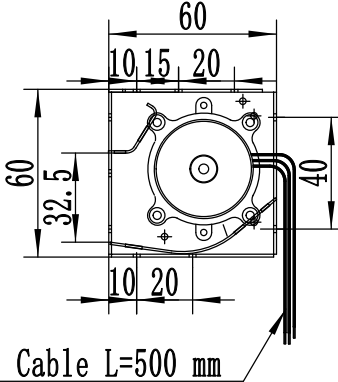
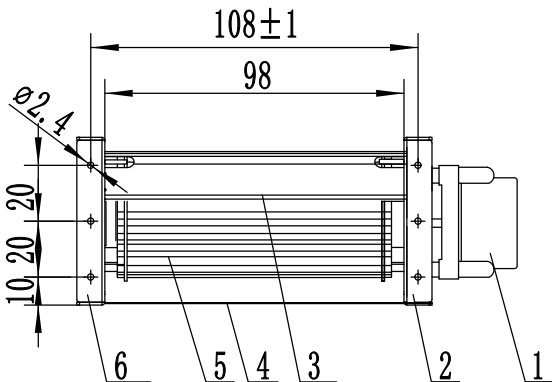
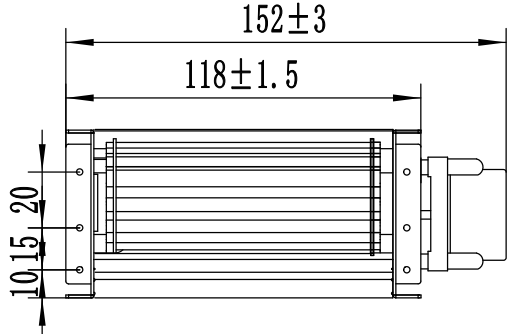


1	2	3	4	5	6	7	8	
A								A
B	 3 Cable L=500 mm   Motor Red (+) 12 V DC Black (-) 12 V DC GND White 0-10V <td>B</td>							B
C								C
D	Technical Request 1.The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects. 2.Shell riveted firmly, no obvious gap, size in line with the drawing requirements. 3.Make the impeller ø43. 4.Safety performance in accordance with GB/T13933-2008 regulations. 5.Unnoted tolerance is GB/T1804-v.							D
E	1 2 3 4 5 6 7 8 Stage Mark S Version A1 Name GUO Date 20250923 Design Audit Technical Standard Mark Qty Sign Name Date Approve Material Ratio 1:1 Weight Ningbo Longwell Electric Technology Co., Limited LWCD-4390LN-06 第 1 页 共 1 页							E
F	1 2 3 4 5 6 7 8 Specification VOLTAGE (V) DC 12V CURRENT (A) 0.12 SPEED (r/min) 2400 AIR VOLUME (m³/h) 44 BEARINGS Ball bearing Speed control 0~10V INPUT POWER (W) 2.4							F