


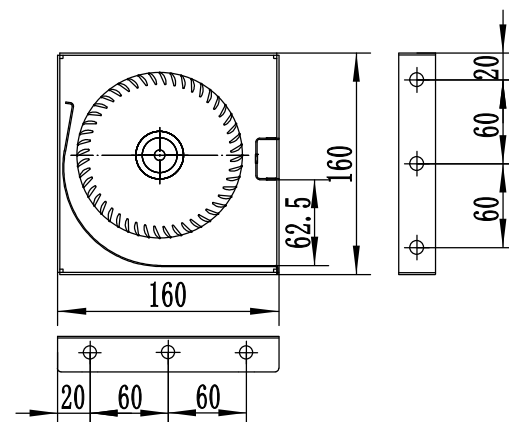

- 1, product appearance requirements no rust, mildew, scratch, no obvious burr and other surface defects.
- 2, the shell riveted firmly, no obvious gap, size in accordance with the drawing requirements.
3. Make the impeller $\phi 120$, number of leaves 48, steel shaft $\phi 8$, spindle sleeve $\phi 8$.
- 4, impeller direction: left rotation, oblique flow, shaft sleeve external.
5. Unnoted tolerance is GB/T1804-v.

VOLTAGE (V)	230
FREQUENCY (Hz)	50
SPEED (r/min)	1350
AIR VOLUME (m ³ /h)	2000
BEARINGS	Ball bearing
POWER	170

						Stage Mark				Material		Ratio		1:1		Weight			
						S				 		Ningbo Longwell Electric Technology Co., Limited							
						Al				LWCA-120900SN-06									
						Design		JIN										2023.11.30	
						Audit													
						Technical													
						Standard													
Mark		Qty		Sign		Name		Date		Approve						第 1 页 共 1 页			