
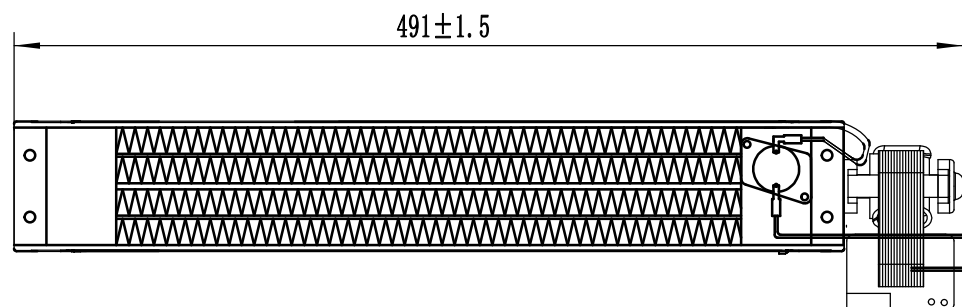


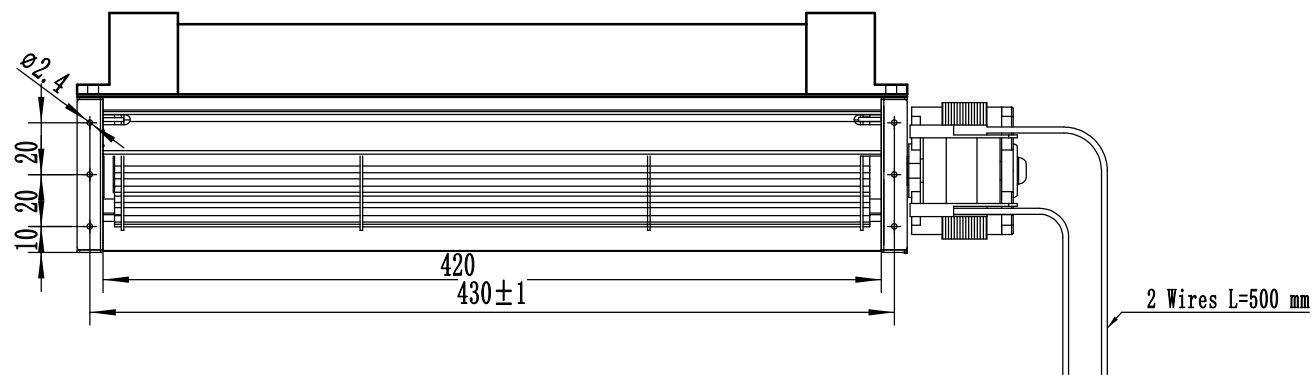

1. The appearance and surface of the product should be clean, without rust spots, mold, scratches, obvious burrs and other surface defects.
2. The shell is riveted firmly, there is no obvious gap, and the size meets the drawing requirements.
3. The safety performance conforms to the provisions of GB/T13933-2008.
4. The tolerance is not indicated as GB/T1804-V.
5. Install a 400W PTC heater.

SPECIFICATION	
VOLTAGE (V)	230
Frequency (Hz)	50
SPEED (r/min)	1500
BEARINGS	Ball bearing

					阶段标记				 		材料		比例		1:2		重量	
					S	A					宁波朗伟电器科技有限公司							
					版本	A1	姓 名		日 期		LWCA-43420SN-08							
					设计		HE		20240709									
					审核													
					工艺													
					标准						第 1 页 共 1 页							
标记	处数	更改文件号	签 名	日 期	批准													