





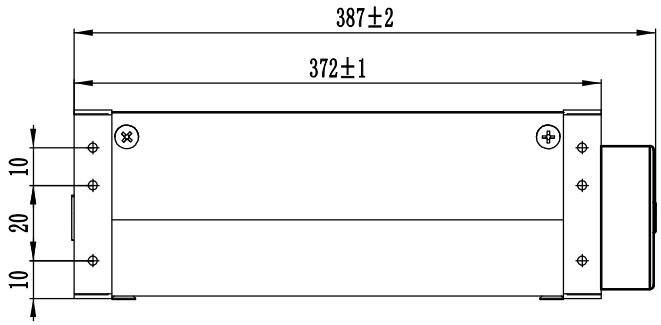

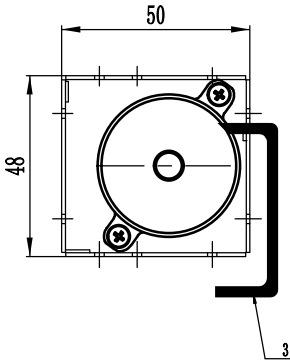

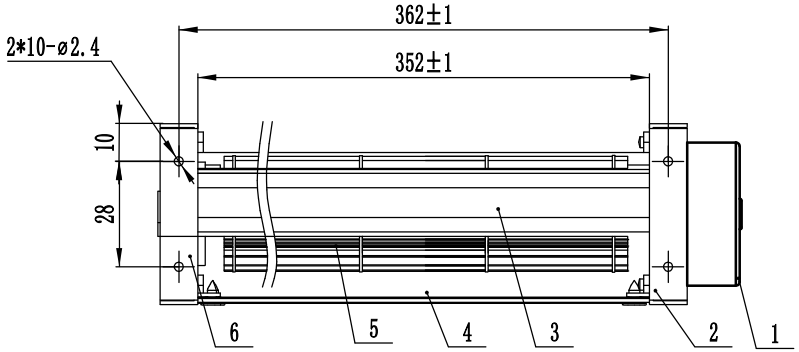



Technical Request

1. The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects.
2. Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
3. Make the impeller ø30,20 blades, steel shaft ø3, bushing ø 1.5
4. Safety performance in accordance with GB/T13933-2008 regulations.
5. Unnoted tolerance is GB/T1804-v.

SPECIFICATION	
VOLTAGE (V)	24
CURRENT (A)	0.08
SPEED (r/min)	2500
AIR VOLUME (m^3/h)	108
BEARINGS	oil bearing
SPEED CONTROL	0~10V

序号	代号	名称	数量	材料	单件 重量	总计	备注
6	30 sheet metal	Left Side Plate	1	Iron			
5	ø30 Impeller	Impeller	1	Aluminium			
4	30 sheet metal	Air Outlet Plate	1	Aluminium			
3	30 sheet metal	Air Inlet Plate		Aluminium			
2	30 sheet metal	Right Side Plate	1	Iron			
1	3830 1-Phase	Motor	1				

Mark	Qty	Sign	Name	Date

	Name	Date
Stage Mark: S		
Version: A1		
Design	He	20240529
Audit		
Technical		
Standard		
Approve		

Material | Ratio 1:1 | Weight

Ningbo Longwell Electric Technology Co., Limited

LWCD-30350MN-07S

第 1 页 共 1 页