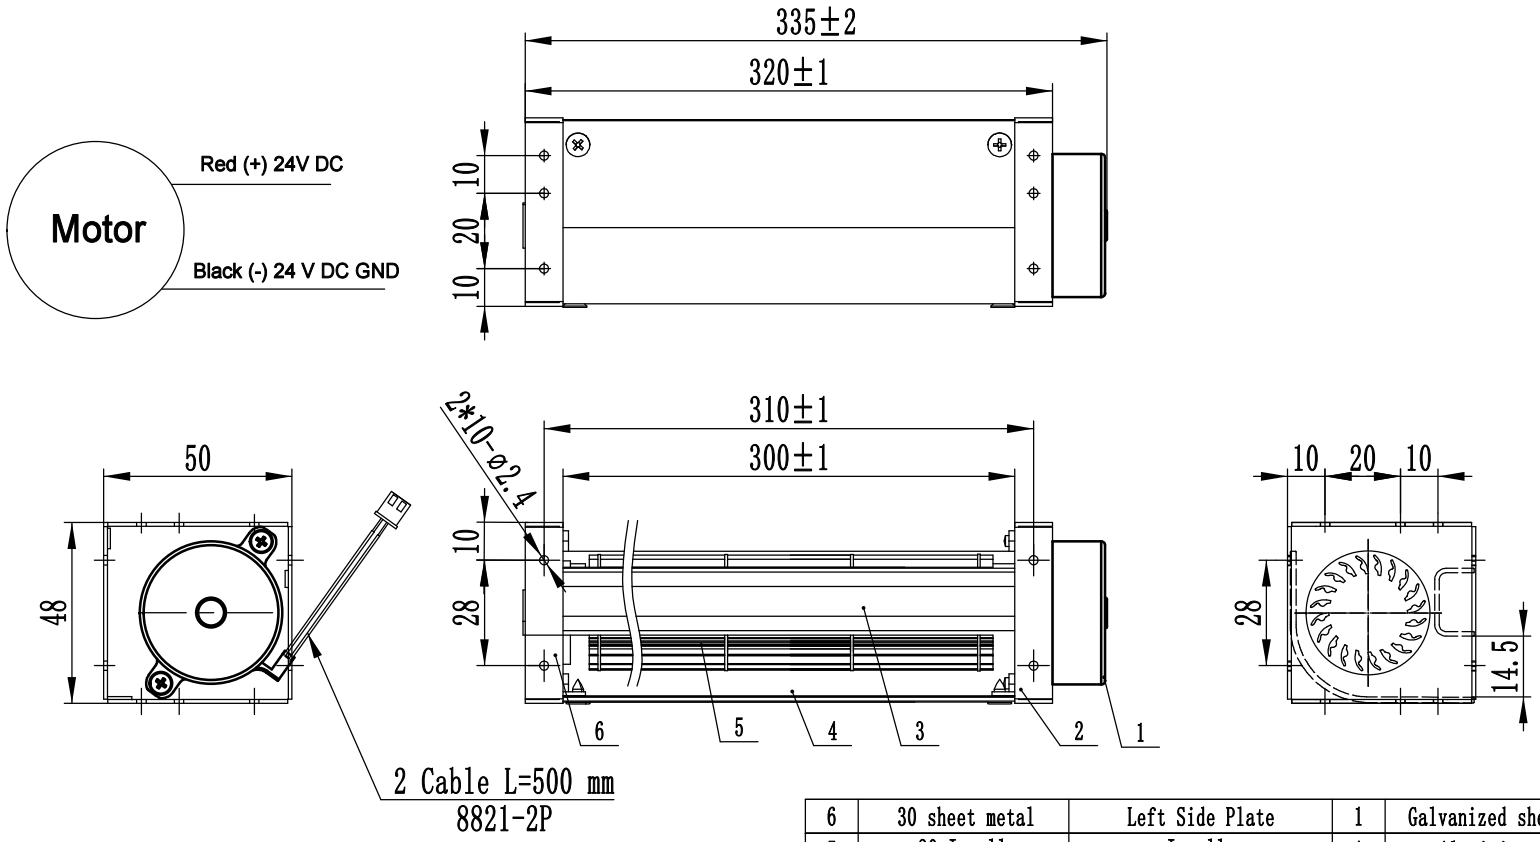


Technical Request

1. The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects.
2. Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
3. Make the impeller ø30,20 blades, steel shaft ø3, bushing ø 1.5
4. Safety performance in accordance with GB/T13933-2008 regulations.
5. Unnoted tolerance is GB/T1804-v.

SPECIFICATION	
VOLTAGE (V)	24
CURRENT (A)	0.07
SPEED (r/min)	2600
AIR VOLUME (m^3/h)	88
BEARINGS	Oil bearing

序号	代号	名称	数量	材料	单件 重量	总计	备注
6	30 sheet metal	Left Side Plate	1	Galvanized sheet			
5	ø30 Impeller	Impeller	1	Aluminium			
4	30 sheet metal	Air Outlet Plate	1	Galvanized sheet			
3	30 sheet metal	Air Inlet Plate		Galvanized sheet			
2	30 sheet metal	Right Side Plate	1	Galvanized sheet			
1	3830 1-Phase	Motor	1				

Mark	Qty	Sign	Name	Date	Stage Mark: S	Version: A1	Name	Date
					Design	He	20240731	
					Audit			
					Technical			
					Standard			
					Approve			

Material | Ratio 1:1 | Weight

Ningbo Longwell Electric Technology Co., Limited

LWCD-30290MN-07

第 1 页 共 1 页